


Table T25

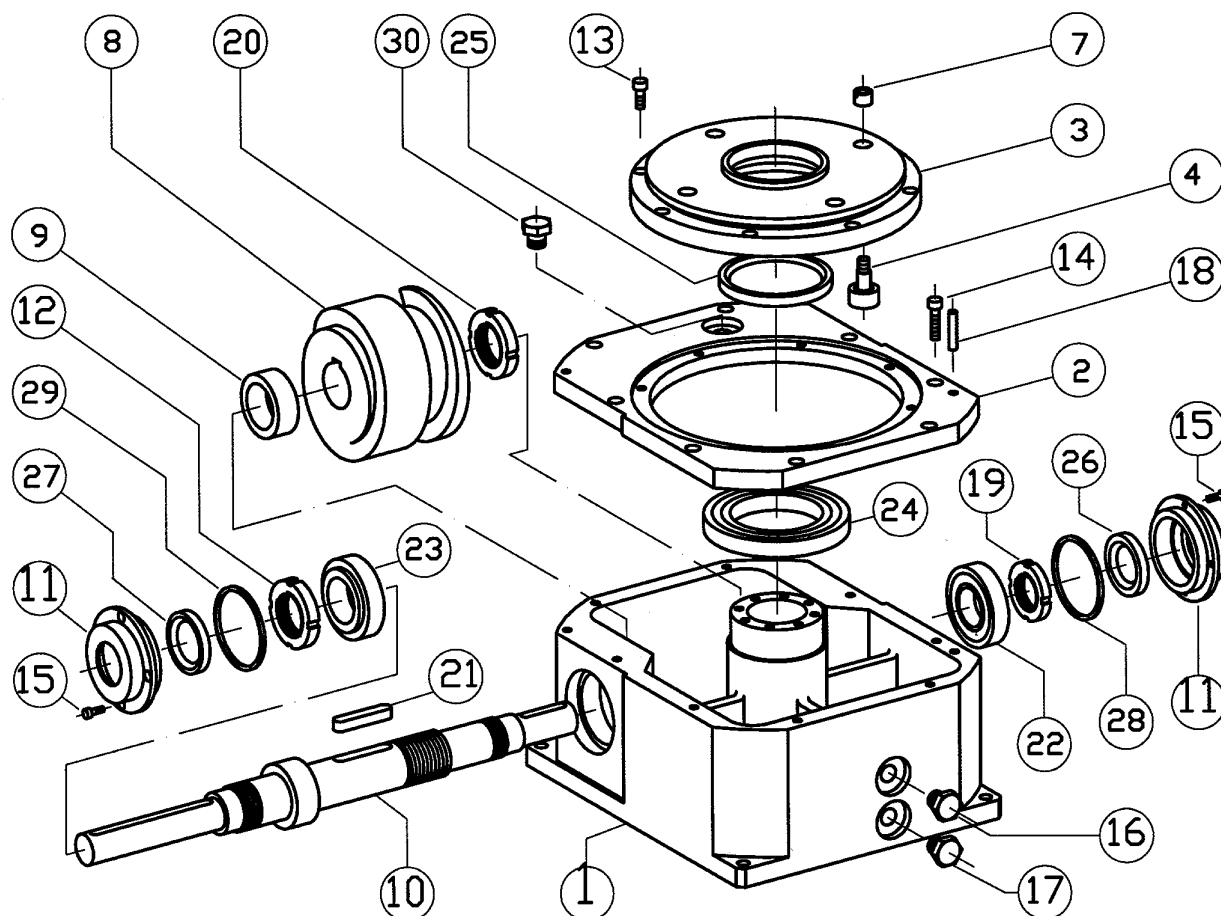

Ref.	Description	Q.	Ref.	Description	Q.
1	CASING	1	17	OIL PLUG 58501 ELESA	1
2	COVER	1	18	PARALLEL PIN 6X30	2
3	INDEXING DISK	1	19	THREADED LOCKING RING M30X1,5 E.STOP	1
4	CAM FOLLOWER-PIN-WASHER	S	20	THREADED LOCKING RING M35X1,5 E.STOP	1
7	NUT	S	21	KEYWAY 10X8X50	1
8	CAM	1	22	BEARING RIV 30206	1
9	SPACER RING	1	23	BEARING RIV 32007X	1
10	CAM SHAFT HOLDER	1	24	BEARING RIV 16014	1
11	SIDE FLANGE 02674	2	25	SEAL ANGST+PFISTER A70858	1
12	THREADED LOCKING RING M35X1,5 E.STOP	1	26	SEAL ANGST+PFISTER A28477	1
13	HEXAGONAL SOCKET SCREW M6X20	7	27	SEAL ANGST+PFISTER A32477	1
13	HEXAGONAL SOCKET SCREW M6X14 (*)	1	28	SEAL ANGST+PFISTER OR 3231	1
14	HEXAGONAL SOCKET SCREW M6X25	8	29	SEAL ANGST+PFISTER OR 3231	1
15	FLAT HEAD SOCKET SCREW M4X12	4	30	OIL PLUG WITH VENT TCF 58901 ELESA	1
16	OIL PLUG 58501 ELESA	1			

(*)The screws which lock the fixed part of the indexing disk to the casing are shorter on the cam side than on the other sides

For S value see table 5 - page 6