


Available Types

	Type Ordering key	Contact		Clamping band	Side mounting	4-hole bottom mounting	Replaceable barrier	Suppression diode	Polarity protection	Auxiliary contact	Weight kg / pound
		NO	NC								
12V	26.56.22	x				x		x			0.93 / 2.05
	26.56.238	x			x		x	x			0.63 / 1.39
24V / 28V	26.56.01	x				x		x	x		0.93 / 2.05
	26.56.02	x				x		x			0.93 / 2.05
	26.56.03	x				x					0.93 / 2.05
	26.56.04	x		x				x	x		0.63 / 1.39
	26.56.05	x		x				x			0.63 / 1.39
	26.56.06*	x		x							0.63 / 1.39
	26.56.07	x			x			x	x		0.63 / 1.39
	26.56.08	x			x			x			0.63 / 1.39
	26.56.09	x			x						0.63 / 1.39
	26.56.31	x				x	x	x	x		0.93 / 2.05
	26.56.32	x				x	x	x			0.93 / 2.05
	26.56.33	x				x	x				0.93 / 2.05
	26.56.34	x		x			x	x	x		0.63 / 1.39
	26.56.35	x		x			x	x			0.63 / 1.39
	26.56.36	x		x			x				0.63 / 1.39
	26.56.37	x			x		x	x	x		0.63 / 1.39
	26.56.38	x			x		x	x			0.63 / 1.39
	26.56.39	x			x		x				0.63 / 1.39
	26.56.75	x		x				x		x	0.66 / 1.46
	26.56.78	x			x			x		x	0.66 / 1.46
	26.27.07		x		x			x	x		0.66 / 1.46
	26.27.08		x		x			x			0.66 / 1.46
	26.27.09		x		x						0.66 / 1.46


Other types and customer specified types upon request / * Standard version

Circuits


NO-Contact



Suppression diode




Suppression diode
Polarity protection



Suppression diode
Auxiliary contact

NC-Contact




Suppression diode

Accessories

Suppression diode


26.08.50

26.05.50.900
reverse polarity

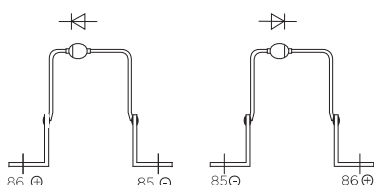

Polarity protection

26.08.51



Angler adapter

26.08.52

