
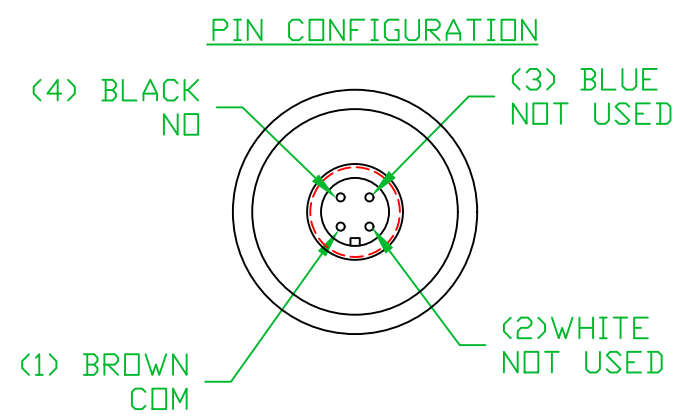


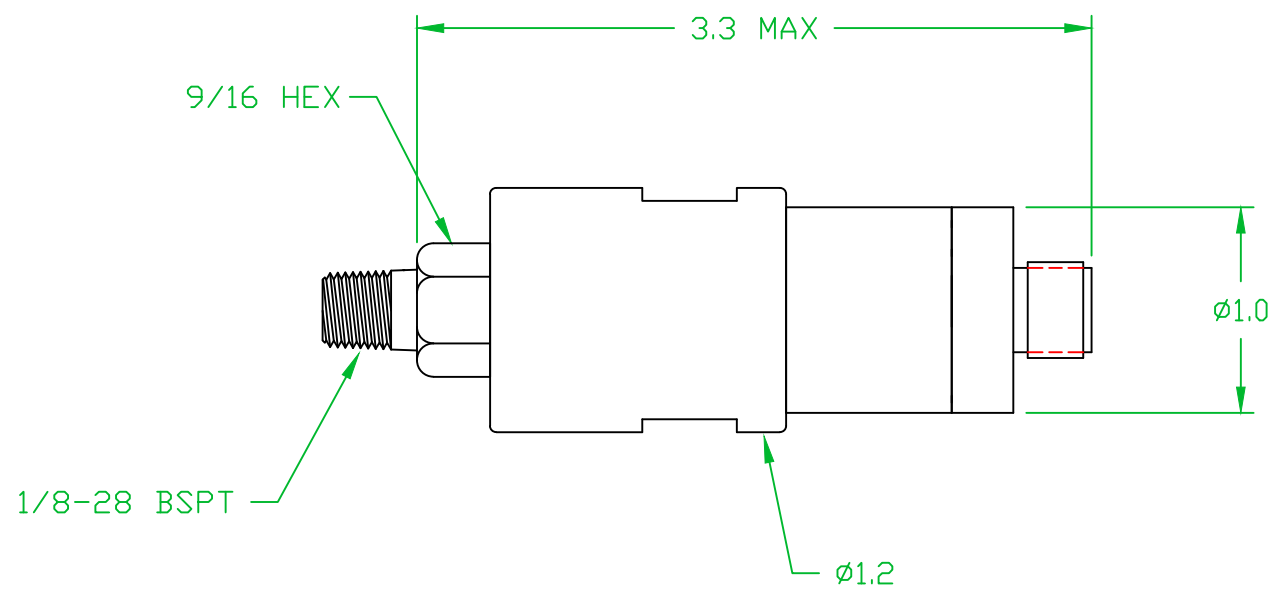

CIRCUIT: SPST-NO (SINGLE POLE SINGLE THROW-NORMALLY OPEN)
 TERMINATION: MICRO M12 CONNECTOR, MALE
 RSF-4/0.5M OR EQUIVALENT.
 RATING: GOLD CONTACTS FOR LOW CURRENT
 OPERATION: CIRCUIT TO CLOSE AT 50 ±3 PSI
 FALLING PRESSURE.

MAX OPERATING PRESSURE: 5000 PSI

MATERIALS:
 BASE- STEEL ZINC PLATED
 HOUSING- STEEL ZINC PLATED
 DIAPHRAGM MATERIAL- BUNA N

ADD 26040629 IN SMALL PRINT TO LABEL.

NASON P.O. BOX 505 WEST UNION, SC 29696 Ph: (864)638-9521 Fax: (864)638-7903		
CUSTOMER APPLIED CONTROLS	DATE 2/18/21	DRAWN BY J.D.C.
	SCALE 1 : 1	APPROVED BY
REFERENCE AREA GLEASON /26040629	CHANGE ON CAD ONLY.	
TITLE PRESSURE SWITCH MODEL/XM	DRAWING NUMBER XM-19A-50F/ESAU609	