


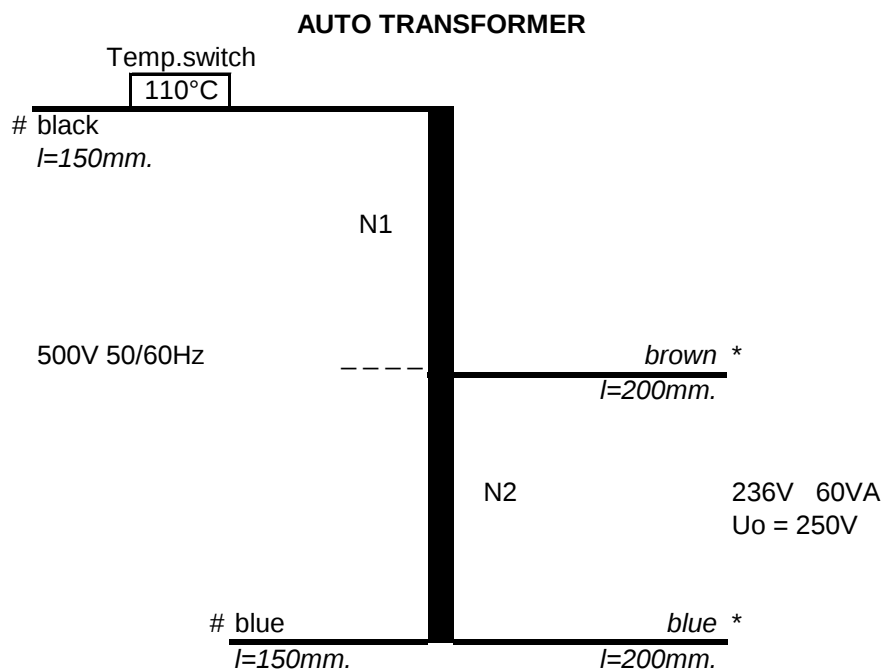

FO/SA/7.4/03

Customer: Pulskontroll AB**Transf. No. AA-131016-AT****Designed: 2013-05-16/mg****Rev. C. 2017-06-29/sr**

Mounting hardware: Potted centre with drilled centre hole for M5.
 1 pc, metal washer D= 60 mm.
 2 pcs, rubber pads D= 60 mm.
 Mounted on a metal plate according to A4-51329189 Rev D.

Dimensions: OD = max. 72 mm.
 H = max. 40 mm. (excl. The mounting hardware)

Terminations: Multistranded wire Style 1015 AWG 20, final length according to above.

#) Supplied with end socket 10 mm (B075-10ET)

*) Supplied with 3-SVH-2T-P, 3-pole housing VHR-3N

**Noratel Sweden AB****Auto transformer AA-131016-AT Rev.C****Input 500V BK-BU****Output 250V 60VA BN-BU****Temp.switch 110°C inside t/f connected to black**