

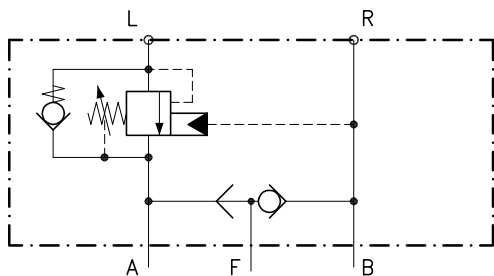


Technical features

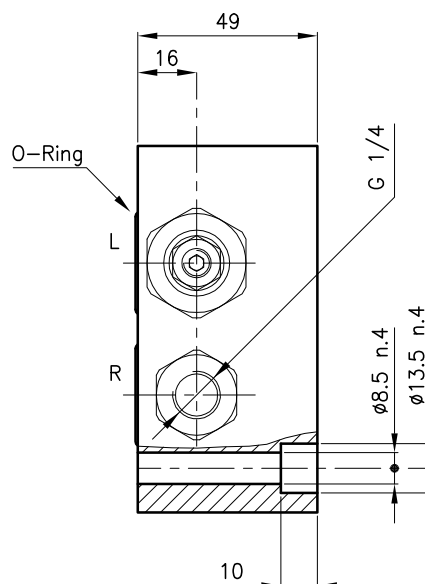

Valves	(For features see catalogue 07.060)	CMQ 30
	(For features see catalogue 05.320)	CCE 20
Max. flow	(l/min.)	50
Max. system pressure	(bar)	315
Max. setting pressure	(bar)	420
Pilot ratio		8:1
Fluid viscosity range	(cSt)	2.8 - 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	1.350

Dimensions

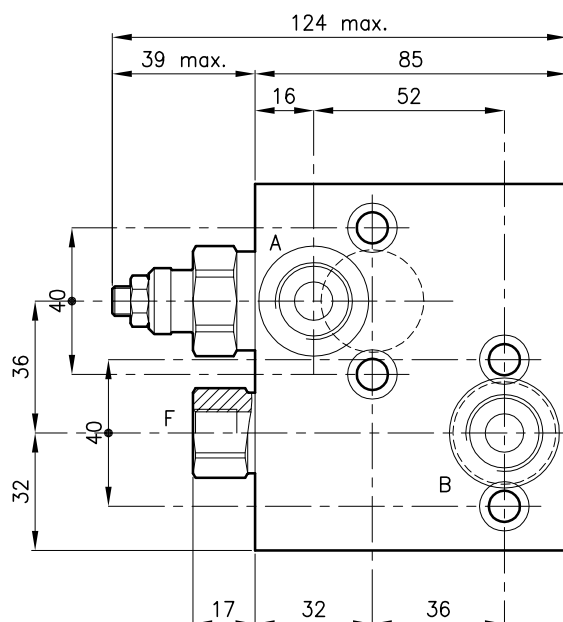

Ordering informations

CMQ 30/T-L-FDR 23-B08

CMQ 30 = Valve type

Standard springs

Type Setting range

D = 25 - 125 bar 105 bar

T = 105 - 420 bar 280 bar

Adjustment type

L = Adjustment with overset protection

Version

Standard ports

B08 = G 1/2 ISO 228

Codes:

CMQ 30/D-L-FDR 23-B08 34 011 112

CMQ 30/T-L-FDR 23-B08 34 011 113

Only body code:

Body type 30-FDR 23-B08 38 147 132