


This series of bodies, realized in anodized aluminium alloy includes all standard versions normally available.

On request they can be supplied in galvanized steel and with different uses.

For out standard uses choiche please see technical schedule 17.010 (D - I - S type ports).

2 WAY EMERGENCY BODIES

Body **LO/E** type - **2** way



20-LO/E-B05

S 20/2

G 1/4 (B05)

0.230

20-LO/E-B06

S 20/2

G 3/8 (B06)

0.230

28-LO/E-B06

S 28/2

G 3/8 (B06)

0.230

30-LO/E-B06

S 30/2

G 3/8 (B06)

0.270

30-LO/E-B08

S 30/2

G 1/2 (B08)

0.270

50-LO/E-B08

S 50/2

G 1/2 (B08)



0.610

50-LO/E-B12

S 50/2

G 3/4 (B12)

0.610

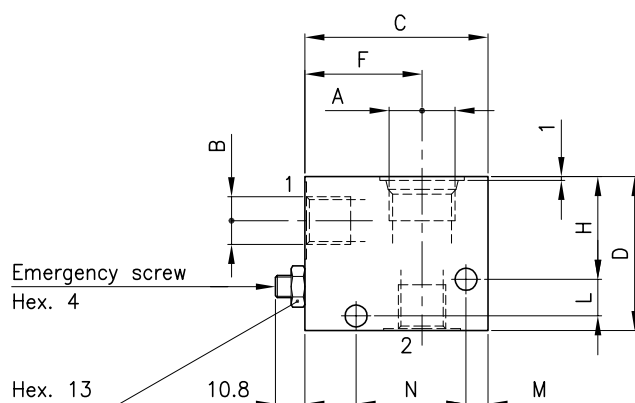

Series	Ordering Code	A	B	C	D	E	F	G	H	L	M	N	P
20	20-LO/E-B05 (28 111 101)	S 20/2	G 1/4 (B05)	55	50	30	35	14	30	15	6	30	6.5
	20-LO/E-B06 (28 111 102)	M 18x1.5	G 3/8 (B06)	55	50	30	35	14	30	15	6	30	6.5
28		S 28/2											
	28-LO/E-B06 (28 111 100)	3/4-16 UNF	G 3/8 (B06)	55	50	30	35	14	30	15	6	30	6.5
30	30-LO/E-B06 (38 111 137)	S 30/2	G 3/8 (B06)	60	55	30	35	16	30	20	6	40	6.5
	30-LO/E-B08 (38 111 138)	M 22x1.5	G 1/2 (B08)	60	55	30	35	16	30	20	6	40	6.5
50	50-LO/E-B08 (58 111 123)	S 50/2	G 1/2 (B08)	70	70	45	45	22	48	15	6	50	6.5
	50-LO/E-B12 (58 111 124)	M 33x2	G 3/4 (B12)	70	70	45	45	22	48	15	6	50	6.5